

# Enviroflood

IP54


Enviroflood is a large asymmetric 2x400W or 1kW floodlight offering low glare performance and rugged construction. These features make it suitable for many large area and industrial floodlighting situations.

**Applications**

- Outdoor Carparks
- Livestock Yards
- Security Lighting
- Container Terminals
- Airport Aprons
- Traffic Roundabouts




**Photometric design data**


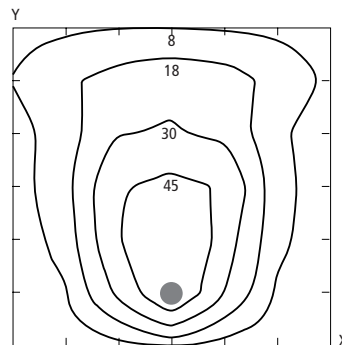


**Horizontal illumination – Enviroflood 1000W SON**  
 Mounting height – 18.0m Area – 60m x 60m  
 X increments = 10.0m Y increments = 10.0m  
 Plane height = 0.0m Aiming angle – 5°  
**Windage** – 0.21 m<sup>2</sup> **Weight** – 26.0 kg

See page 99 for remote control gear options.

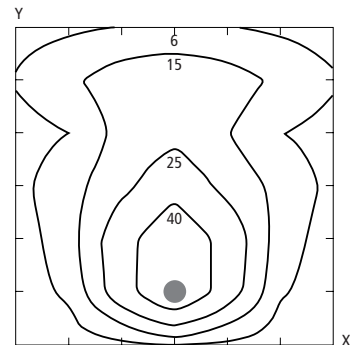

**Horizontal illumination – Enviroflood 2 x 400W SON**  
 Mounting height – 18.0m Area – 60m x 60m  
 X increments = 10.0m Y increments = 10.0m  
 Plane height = 0.0m Aiming angle – 5°  
**Windage** – 0.21 m<sup>2</sup> **Weight** – 26.0 kg



**Product reference**

Lamp and control gear ordered separately

ENV1000M2E39	MI1000/U
ENV1KWHQIE40	HQIT1000/D
ENV2400M2E40	HQI-BT400-NAVT400

**Accessories**

AFHOOD11000	apron flood hood 1000W
AFHOOD2400	apron flood hood 2 x 400W