

Low Mounter MK2



Low Mounter 2 combines energy savings and low cost, with a low profile housing, suitable for surface mounting or chain suspension and an efficient reflector optimises performance. Low Mounter II can be used anywhere in



general low bay situations.

Applications

Warehouses	Loading Docks
Production Areas	Squash Courts
Multipurpose Halls	Retail Stores



Photometric design data

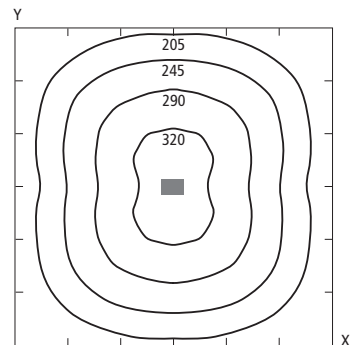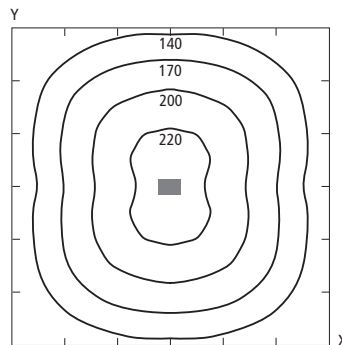

Horizontal illumination – Low Mounter MkII LM400MBF



Ceiling height – 5.0m Area – 6m x 6m
X increments = 1.0m Y increments = 1.0m
Plane height = 0.85m

No allowance made for wall and ceiling reflectances

Wired to AS3137 and EMC approved

Horizontal illumination – Low Mounter MkII LM400MHI

Ceiling height – 5.0m Area – 6m x 6m
X increments = 1.0m Y increments = 1.0m
Plane height = 0.85m



Product reference

Lamp ordered separately

LM250MBF	HQL250W	HPF
LM400MBF	HQL400W	HPF
LM250MHI	MI250/U	HPF
LM400MHI	MI400/U	HPF
LM250SON	NAVE250	HPF
LM400SON	NAVE400	HPF

Accessories

LMWG	wire guard
LMGLA	glass cover
LMTL	transverse louvre